



Gesteinkörnung : 16/22.4 roulé
Petrographischer Typ : Alpine Moräne - Oberheinkies und sand

Normative Teil

Werte auf die sich der producent verpflichtet

Lieferkörnung

Norme

Kategorie

16 22.4

Norme XP P 18-545 Article 10 - EN 12620 et EN 13139

Code A


	0.063	d/2	8	10	12.5	14	d	16	18	20	D	22.4	25	31.5	45	f	FI	W
Ausmas								15				15						
V.S.S.+U	2.1	6						25				100					24.00	
V.S.S.	1.5	5						20				96				1.50	20.00	
V.S.I.		0						5				81		98	100			
V.S.I.-U		0						0				76		97				

Informative Teil

Produktion resultat

von 16/01/23 bis 07/08/23

	0.063	8	10	12.5	14	16	18	20	22.4	25	31.5	45	f	FI	W
Maxi	0.1	1	1	3	8	22	47	73	92	99	100	100	0.12	17.41	7.8
Xk+1.25xAbstand-type	0.1	0	1	2	6	19	41	67	88	99	100	100	0.07		
Mittelwert Xf	0.0	0	0	1	4	13	32	58	84	97	100	100	0.04	15.58	2.0
Xk-1.25xAbstand-type	0.0	0	0	0	1	7	23	48	79	95	100	100	0.00		
Mini	0.0	0	0	0	1	5	22	47	80	94	100	100	0.01	12.00	0.4
Abstand-type	0.03	0.2	0.3	0.9	2.2	4.7	7.4	7.5	3.6	1.6	0.0	0.0	0.031	2.529	2.10

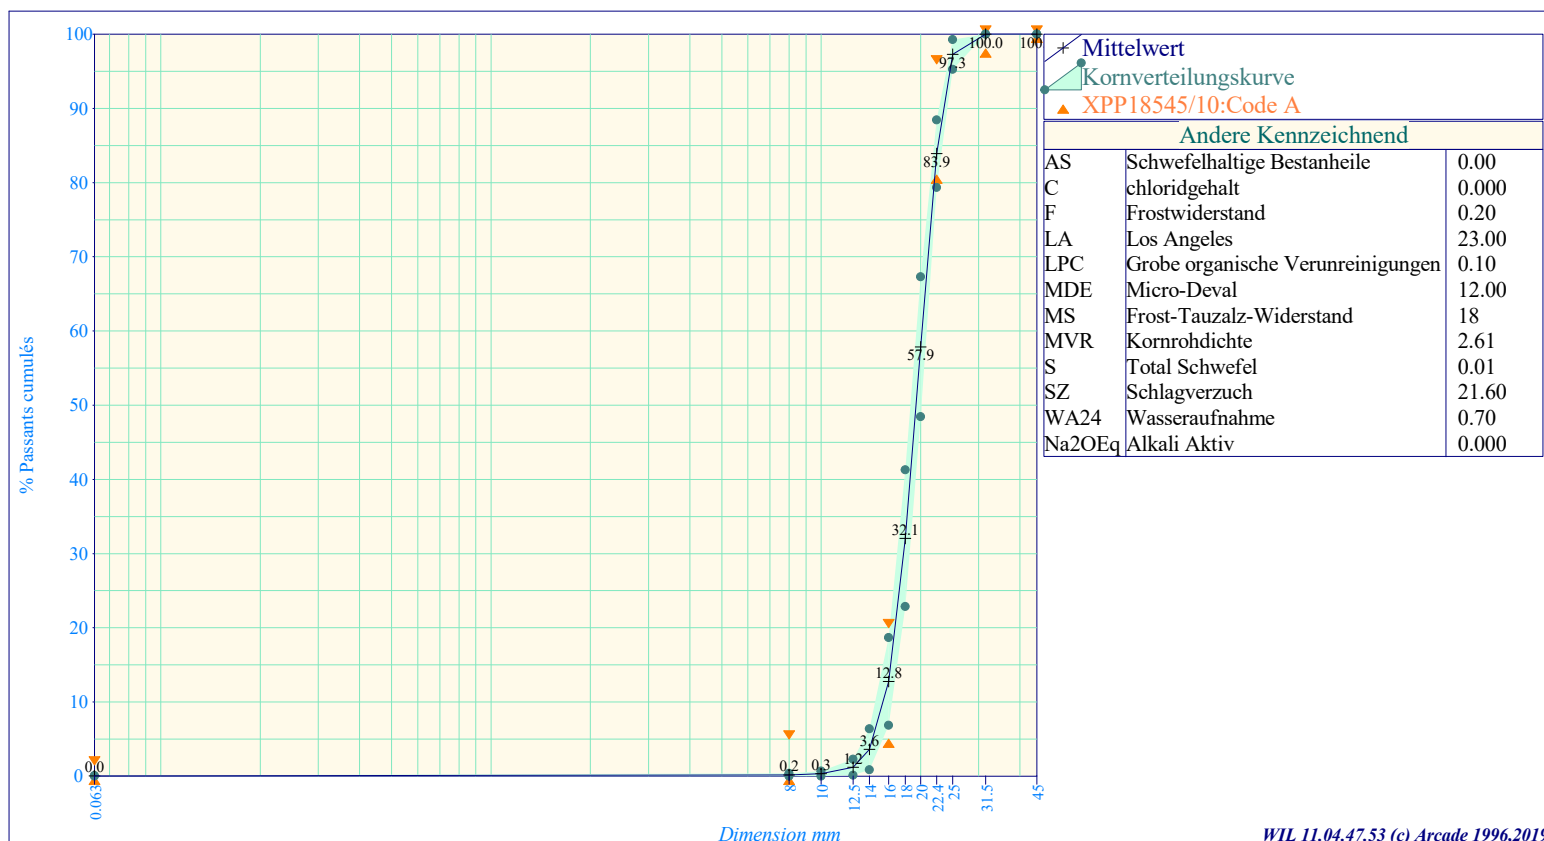

Dimension mm

WIL 11.04.47.53 (c) Arcade 1996,2019