



Gesteinkörnung : 16/22.4 roulé
Petrographischer Typ : Alpine Moräne - Oberheinkies und sand

Normative Teil

Werte auf die sich der producent verpflichtet

Lieferkörnung

Norme

Kategorie

16 22.4

Norme XP P 18-545 Article 10 - EN 12620 et EN 13139

Code A


	0.063	d/2	8	10	12.5	14	D/1.4	16	18	20	D	22.4	25	31.5	45	f	FI	W
Ausmas								15				15						
V.S.S.+U	2.1	6						25				100					24.00	
V.S.S.	1.5	5						20				96				1.50	20.00	
V.S.I.		0						5				81		98	100			
V.S.I.-U		0						0				76		97				

Informative Teil

Produktion resultat

von 16/09/24 bis 12/05/25

	0.063	8	10	12.5	14	16	18	20	22.4	25	31.5	45	f	FI	W
Maxi	0.0	0	1	4	10	20	52	76	93	99	100	100	0.05	18.65	1.5
Xk+1.25xAbstand-type	0.0	0	1	4	9	21	49	74	91	99	100	100	0.03		1.5
Mittelwert Xf	0.0	0	0	2	5	15	38	62	86	98	100	100	0.02	16.95	1.3
Xk-1.25xAbstand-type	0.0	0	0	0	2	10	28	51	81	96	100	100	0.00		1.1
Mini	0.0	0	0	0	1	8	26	50	81	94	100	100	0.00	14.95	1.1
Abstand-type	0.01	0.1	0.2	1.2	2.9	4.3	8.3	9.1	4.2	1.3	0.0	0.0	0.013	1.387	0.20

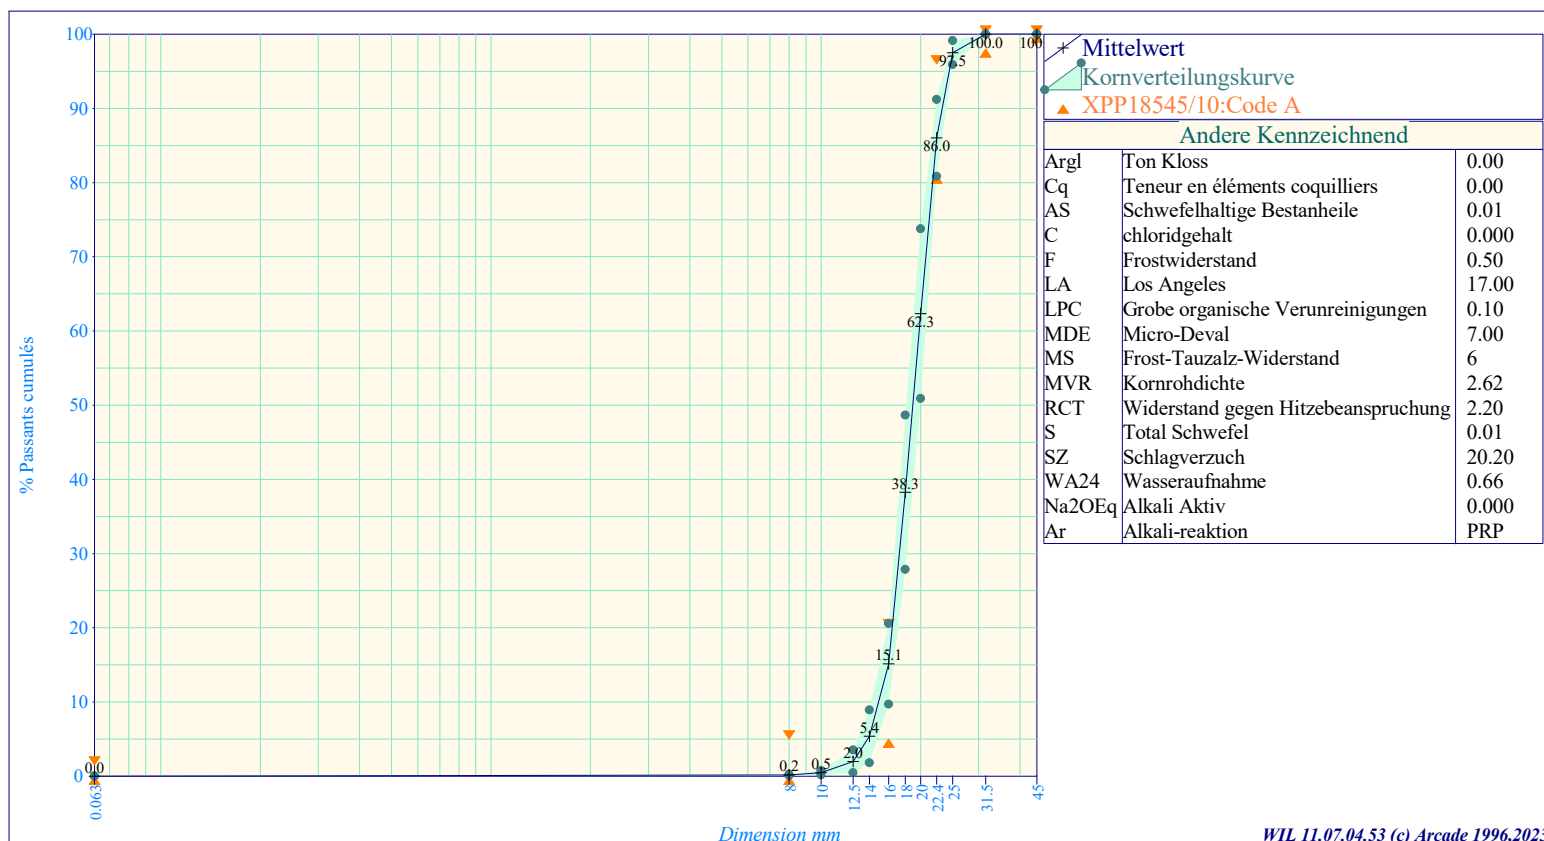

Dimension mm

WIL 11.07.04.53 (c) Arcade 1996,2023